

DIN 376

HSS-E

OX

Form B



UK


Special tap for through holes for hard - to - machine materials, e.g. stainless steels.

D

Spezieller Gewindebohrer für Durchgangsgewinde in schwer zerspanbaren Werkstoffen wie z. B. rostfreien Stählen.

F

Taraud spécial pour taraudage de matériaux durs comme per ex. acier inoxydable.

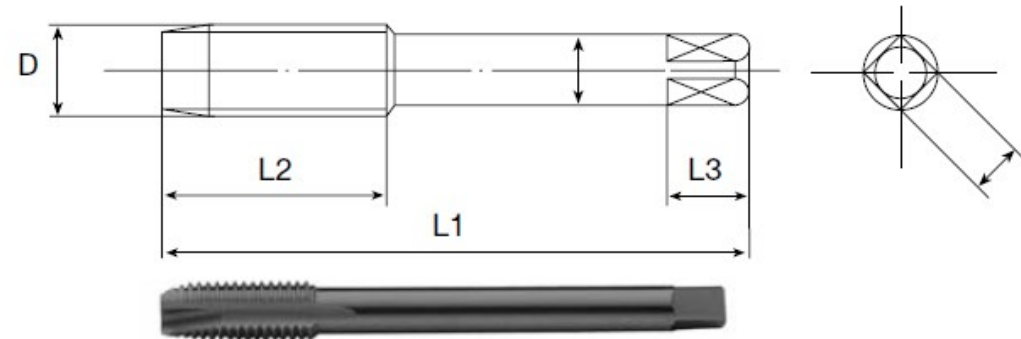

unit: mm

D	P	L1	L2	d h9	L3	a h12	N	stock, ab Lager, stock			
								Tol.6H	Price, Preis, Prix €	Tol.6G	Price, Preis, Prix €
M 6	1.00	80	19	4.5	6	3.4	3	○	13,57 14,49		— —
M 8	1.25	90	22	6.0	8	4.9	3	○	16,43		—
M 10	1.50	100	24	7.0	8	5.5	3	○	19,29		20,31
M 12	1.75	110	29	9.0	10	7.0	3	○	23,47	○	24,49
M 14	2.00	110	30	11.0	12	9.0	3	○	29,59	○	31,12
M 16	2.00	110	32	12.0	12	9.0	3	○	43,37	○	—
M 18	2.50	125	34	14.0	14	11.0	3	○	48,47		—
M 20	2.50	140	34	16.0	15	12.0	3	○	62,76		—
M 22	2.50	140	34	18.0	17	14.5	3	○	78,06		—

Packing unit: 10 pcs,
Verpackungseinheit: 10 Stück,
Unité d'emballage: 10 pcs

N: Number of flutes Zähnezahl Nombre de dents
P: Pitch Steigung Pas