




TYPE 27

DEPRESSED CENTER GRINDING WHEELS FOR PORTABLE ANGLE GRINDERS

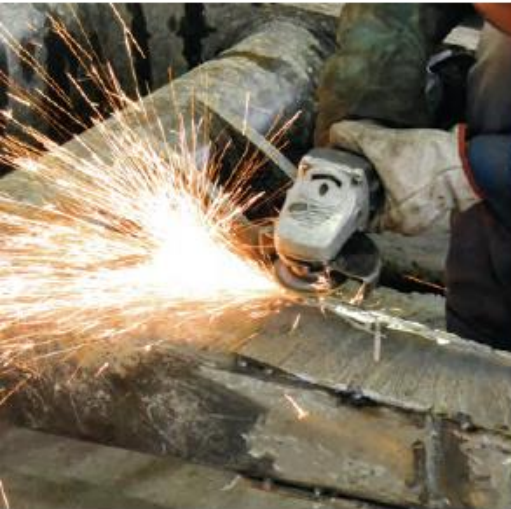

GRINDING

The wide range of GLOBE grinding wheels offers different levels of hardness and different removal rates in order to provide the operator with the possibility to choose the most suitable type for the work to be carried out. GLOBE wheels are designed respecting strict limits of unbalancing in order to guarantee the minimum level of vibrations during use. The quality characteristics of GLOBE wheels enhance the economic efficiency of use in every context, as demonstrated by control and comparative tests conducted in the company laboratories. All the wheels designed for stainless steel have contents of Iron, Sulphur, and Chlorine compounds lower than 0.1%, as indicated on the label (certification available). GLOBE offers a large number of different specifications for the materials to be worked. The choice of the right type is an element of fundamental importance to obtain maximum performance..

STAINLESS STEEL

A 24 30 36 QX: medium hardness and good removal rate. Ideal also for standard and hard stainless steel castings..

115x6,5x22,23	A 24 30 36 QX	80 m/s	G0311	25pz
125x6,5x22,23	A 24 30 36 QX	80 m/s	G0312	25pz
150x7,0x22,23	A 24 30 36 QX	80 m/s	G0313	25pz
180x7,0x22,23	A 24 30 36 QX	80 m/s	G0314	25pz
230x7,0x22,23	A 24 30 36 QX	80 m/s	G0315	25pz

DISC DURABILITY
REMOVAL CAPACITY
REMOVAL ACCURACY

