
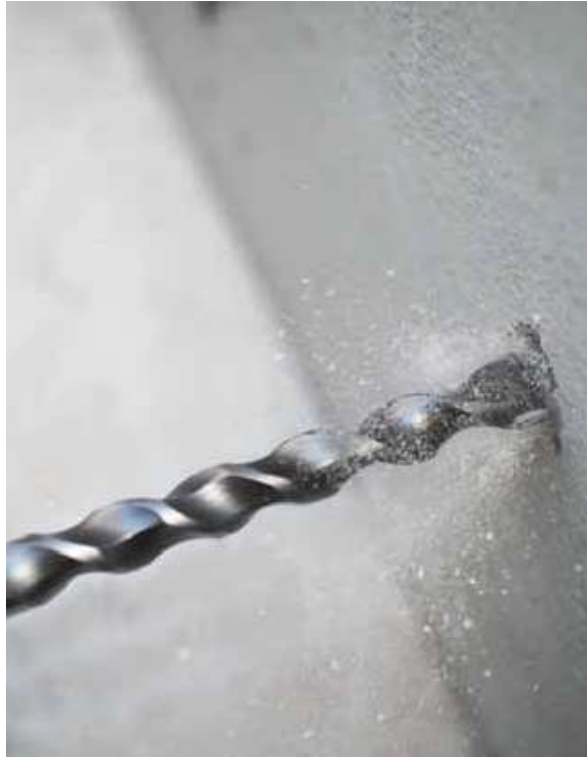


Ref. 110

Twister Plus

Hammer drill bit 2 cutting edges compatible SDS+

Special carbide tip profile combined with TRI-ZONES helix reduce drilling time, limits wear and increases drill bit life time.



Concrete, Stone, Brick, Breeze block



FAST DRILLING

Features

- Concrete breaker tip.
- «Z» line centering tip.
- Variable helix 3 zone.

Benefits

- Accuracy in starting the hole.
- Perfectly round and calibrated hole.
- Fast dust evacuation.
- Resistance and long life.

Shank Hammer drill



Compatible SDS-plus

Ø	WL	TL	Ref.	Gencod	Qty	Ø	WL	TL	Ref.	Gencod	Qty
L 50 x 110						L 200 x 260					
4	50	110	110D04L0110	3336600008359	1	12	150	210	110D12L0210	3336600008571	1
5	50	110	110D05L0110	3336600008366	1	13	150	210	110D13L0210	3336600008588	1
5,5	50	110	110D05.5L0110	3336600023253	1	14	150	210	110D14L0210	3336600008595	1
6	50	110	110D06L0110	3336600008373	1	15	150	210	110D15L0210	3336600008601	1
6,5	50	110	110D06.5L0110	3336600023260	1	16	150	210	110D16L0210	3336600008618	1
7	50	110	110D07L0110	3336600008380	1	18	150	210	110D18L0210	3336600008625	1
8	50	110	110D08L0110	3336600008397	1	20	150	210	110D20L0210	3336600008632	1
10	50	110	110D10L0110	3336600008403	1	22	150	210	110D22L0210	3336600008649	1
L 100 x 160						L 250 x 310					
4	100	160	110D04L0160	33366000067837	1	5	250	310	110D05L0310	3336600166189	1
5	100	160	110D05L0160	3336600008410	1	5,5	250	310	110D05.5L0310	3336600185654	1
5,5	100	160	110D05.5L0160	3336600023277	1	6	250	310	110D06L0310	3336600023291	1
6	100	160	110D06L0160	3336600008427	1	8	250	310	110D08L0310	3336600023307	1
6,5	100	160	110D06.5L0160	3336600020849	1	10	250	310	110D10L0310	3336600023314	1
7	100	160	110D07L0160	3336600008434	1	12	250	310	110D12L0310	3336600023321	1
8	100	160	110D08L0160	3336600008441	1						
9	100	160	110D09L0160	3336600008458	1						
10	100	160	110D10L0160	3336600008465	1						
11	100	160	110D11L0160	3336600008472	1						
12	100	160	110D12L0160	3336600008489	1						
13	100	160	110D13L0160	3336600008496	1						
14	100	160	110D14L0160	3336600008502	1						
15	100	160	110D15L0160	3336600008519	1						
16	100	160	110D16L0160	3336600008526	1						
L 150 x 210						L 250 x 310					
5	150	210	110D05L0210	33366000076457	1	5	250	310	110D05L0310	3336600166189	1
6	150	210	110D06L0210	3336600008533	1	5,5	250	310	110D05.5L0310	3336600185654	1
6,5	150	210	110D06.5L0210	3336600020856	1	6	250	310	110D06L0310	3336600023291	1
7	150	210	110D07L0210	3336600020863	1	8	250	310	110D08L0310	3336600023307	1
8	150	210	110D08L0210	3336600008540	1	10	250	310	110D10L0310	3336600023314	1
9	150	210	110D09L0210	3336600008557	1	12	250	310	110D12L0310	3336600023321	1
10	150	210	110D10L0210	3336600008564	1						
11	150	210	110D11L0210	33366000030107	1						



Ø	WL	TL	Ref.	Gencod	Qty	Ø	WL	TL	Ref.	Gencod	Qty	
13	250	310	110D13L0310	3336600054950	1	22	400	460	110D22L0460	3336600023512	1	
14	250	310	110D14L0310	3336600023338	1	24	400	460	110D24L0460	3336600023529	1	
15	250	310	110D15L0310	3336600023345	1	25	400	460	110D25L0460	3336600023536	1	
16	250	310	110D16L0310	3336600023352	1	26	400	460	110D26L0460	3336600164802	1	
18	250	310	110D18L0310	3336600023369	1	28	400	460	110D28L0460	3336600164833	1	
20	250	310	110D20L0310	3336600023376	1	30	400	460	110D30L0460	3336600164857	1	
22	250	310	110D22L0310	3336600023383	1	L 550 x 610						
24	250	310	110D24L0310	3336600023390	1	8	550	610	110D08L0610	3336600008908	1	
25	250	310	110D25L0310	3336600023406	1	10	550	610	110D10L0610	3336600008915	1	
26	250	310	110D26L0310	3336600164796	1	12	550	610	110D12L0610	3336600008922	1	
28	250	310	110D28L0310	3336600164826	1	14	550	610	110D14L0610	3336600008946	1	
L 350 x 410						16	550	610	110D16L0610	3336600008953	1	
8	350	410	110D08L0410	3336600008786	1	18	550	610	110D18L0610	3336600008960	1	
10	350	410	110D10L0410	3336600008793	1	20	550	610	110D20L0610	3336600008977	1	
12	350	410	110D12L0410	3336600008809	1	22	550	610	110D22L0610	3336600008984	1	
13	350	410	110D13L0410	3336600008816	1	24	550	610	110D24L0610	3336600027367	1	
14	350	410	110D14L0410	3336600008823	1	25	550	610	110D25L0610	3336600008991	1	
16	350	410	110D16L0410	3336600008847	1	26	550	610	110D26L0610	3336600164819	1	
18	350	410	110D18L0410	3336600008854	1	L 940 x 1000						
20	350	410	110D20L0410	3336600008878	1	8	940	1000	110D08L1000	3336600009004	1	
22	350	410	110D22L0410	3336600008885	1	10	940	1000	110D10L1000	3336600009011	1	
24	350	410	110D24L0410	3336600014831	1	12	940	1000	110D12L1000	3336600009028	1	
25	350	410	110D25L0410	3336600008892	1	14	940	1000	110D14L1000	3336600009035	1	
L 400 x 460						16	940	1000	110D16L1000	3336600009042	1	
6	400	460	110D06L0460	3336600119369	1	18	940	1000	110D18L1000	3336600009059	1	
8	400	460	110D08L0460	3336600023413	1	20	940	1000	110D20L1000	3336600009066	1	
10	400	460	110D10L0460	3336600023420	1	22	940	1000	110D22L1000	3336600009073	1	
12	400	460	110D12L0460	3336600023437	1	25	940	1000	110D25L1000	3336600009080	1	
14	400	460	110D14L0460	3336600023451	1							
16	400	460	110D16L0460	3336600023475	1							
18	400	460	110D18L0460	3336600023482	1							
20	400	460	110D20L0460	3336600023505	1							



Grey plastic clip

New TRI-ZONE Flute

③

Extraction area, the patented shape associate a compression area with a decompression chamber to extract thin dust to hole exit

②

Dust extraction accelerating area to the rear.

①

Very fast dust evacuation area, adapted to high dust volume.

EXTRACTION

ACCELERATION

EVACUATION

New Carbide Tip

3 CONTACT POINTS
Focus the percussion efforts to the drilling axis. Increase the speed, the destruction power and the accuracy.

Z FORM SHARP TIP
Chiseling effect and aggressivity increased. High accuracy on the hole starting.

ALL SETS
PAGES 120-121

