


Alternator combination socket

2209



Usage




Profiles






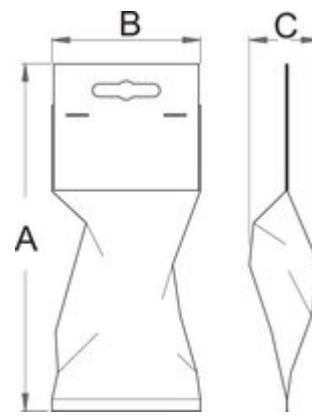
([/eng/support/warranty.](#))

Product features

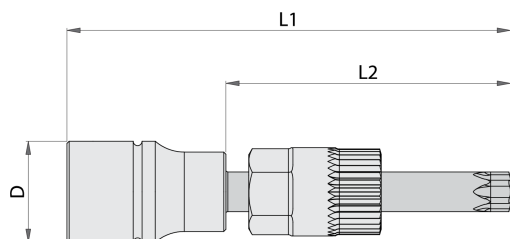

- This two-part tool for the alternator allows the easy dismounting and mounting of the alternator pulley for the purposes of pulley replacement or alternator repair. The alternator is blocked by means of a 10 mm XZN multispline insert; simultaneously, the pulley retaining screw on the shaft is released/tightened. The tool is available as a 1/2" socket key with a XZN – M10 bit and as a 1/2" socket key with a TX50 bit.






|  |  | D | L1 | L2 |  |
|--|---|------|-----|----|---|
| 620225 | M 10 | 23.8 | 113 | 75 | 178 |
| 620948 | TX 50 | 23.8 | 113 | 75 | 176 |



Retail packaging

|  | MA | MB | MC |  |
|--|-----|----|----|---|
| 620225 | 185 | 44 | 44 | 181 |
| 620948 | 185 | 44 | 44 | 181 |

Transport packaging

|  |  | TA | TB | TC |  |
|--|---|----|-----|----|---|
| 620225 | 4 | 91 | 230 | 62 | 784 |
| 620948 | 4 | 91 | 230 | 62 | 784 |