

# Flywheel puller with external thread

3055/4A



## Profiles



[\(/eng/support/warranty\)](#)

## Product features

- material: premium plus carbon steel
- surface finish: blacken to standard DIN 50938
- treads M10, M14, M16, M18, M24 are right hand, M27 are left hand


## Advantages:

- The tool has 6 different sizes of external thread, thus enabling coverage of the majority of motor types that have a flywheel with an internal thread.
- allows flywheel removal without pulling motor from hull


- On each axis, there is an attachment for an open-end wrench that makes the removal of the magnet easier.

**Usage:**

- for removal of the flywheel with internal thread

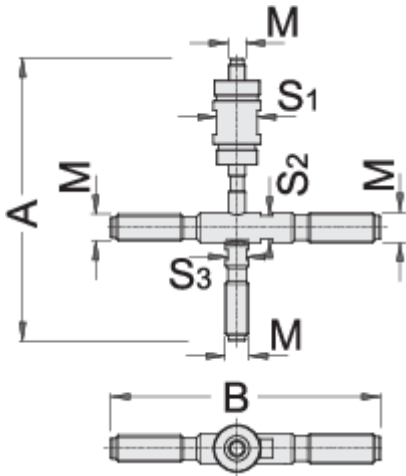

Barcode	M	M1	M2	M3	M3	M3	S1	S2	S3	A	B	Icon
620278	M10 x 1	M14 x 1,5	M16 x 1,5	M27 x 1	M27 x 1	M27 x 1	24	14	11	168	160	531

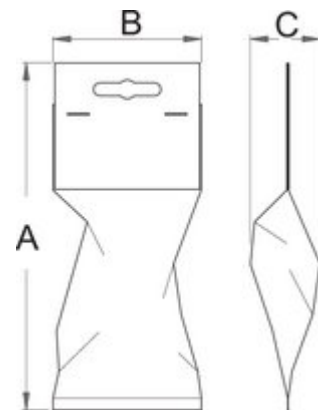

**Retail packaging**

Barcode	MA	MB	MC	Icon
620278	200	150	28	545

**Transport packaging**

Barcode	Icon	TA	TB	TC	Icon
620278	1				