

Spark plug socket 3/8" with thin wall, 6 point

3058/2




Profiles







[./\(eng/support/warranty\).](#)

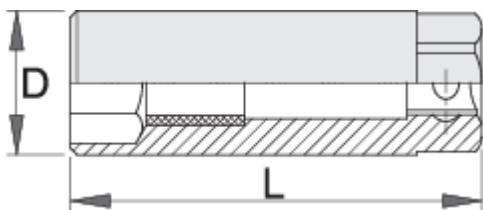Product features

- material: premium chrome vanadium steel
- surface finish: chrome plated according to ISO 1456:2009
- drop forged, entirely hardened and tempered
- intended for use where there is not enough space for working with standard wrenches for replacing spark plugs
- inside the socket inserted rubber ring for holding spark plug



		D	L		
623215	16	20,9	65	19	80
623216	18	22,3	65	22	92



D

L



623217


21

25,6

65


19

111

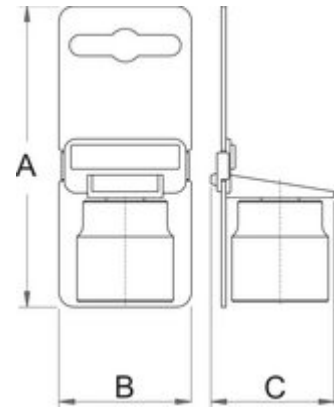

Retail packaging

	MA	MB	MC	
623215	125	44	35	85
623216	125	44	35	100
623217	130	44	35	120

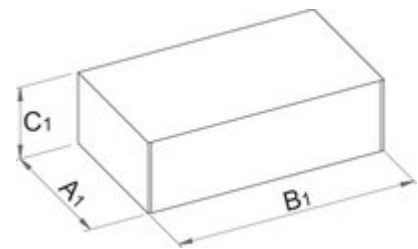

Transport packaging

		TA	TB	TC	
623215	4	104	168	61	401
623216	4	104	168	61	461
623217	4	104	168	61	541