

# Stand for motorcycle wheel alignment

3302/6



## Usage



## Profiles



[./eng/support/warranty\).](http://eng/support/warranty)

## Product features

- material: premium plus carbon steel
- lacquered housing, other parts zinc plated
- the stand is intended mainly for use in motorbike repair services and for home users

## Advantages:


- the stand has a spirit level for setting in a horizontal position
- it enables radial control of the rim position with a sensor
- The geometry of the callipers enables a simultaneous axial

control for accurate truing of the rim.


- The stand enables fixing of cones to the axis that enable the centring of the wheel on its own bearings, thus preventing the possibility of centring errors.
- it has two positions for setting columns regarding the width of the hub
- the rotation of the axis on external bearings enables centring on the standard method

Usage:

- Wheels with dimensions to max 32 inches can be centered.
- for axis dimensions of 12 to 36 mm

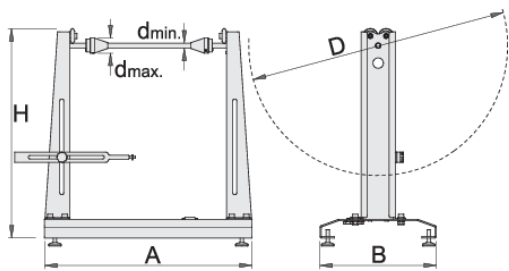

		Minimum diameter	Maximum diameter	A	B	H	
620297	32"	12	36	500	280	525	9600

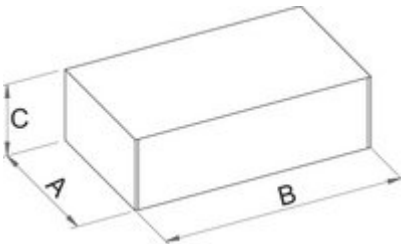

Retail packaging

	MA	MB	MC	
620297	290	530	84	10500

Transport packaging

		TA	TB	TC	
620297	1				