

E-EB




Light-duty fixing suitable for any kind of building materials.


TECHNICAL DATA

Plug material:	polyamide 6, grey color RAL 7035
Screw material:	carbon steel, treated with zinc plating Cr ³⁺ thickness $\geq 5\mu\text{m}$
Installation temperature:	0°C ÷ +40°C
Working temperature:	-40°C ÷ +80°C
Version:	E without collar EB with collar

BUILDING MATERIALS



INSTALLATION METHOD

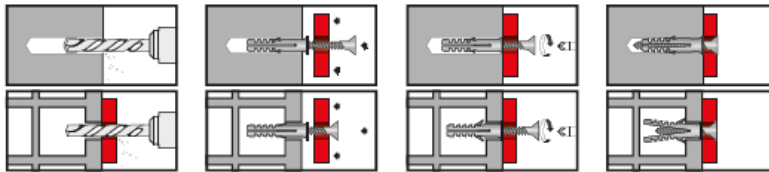

CHARACTERISTICS

- ▶ Wide and uniform expansion.
- ▶ Big anti-rotation fins.
- ▶ Deep anchorage reliefs.
- ▶ Available in several versions without collar for flush fixings or with a safety stop collar.

BENEFITS

- ▶ Versatility: can be used for many applications in many building materials.
- ▶ Cheap and quick installation.
- ▶ High quality of the material which ensures safety and durability.