


TPF/V - TPFC/V

Countersunk flat head screw

Plug with zinc-plated countersunk head screw, slot PZ.

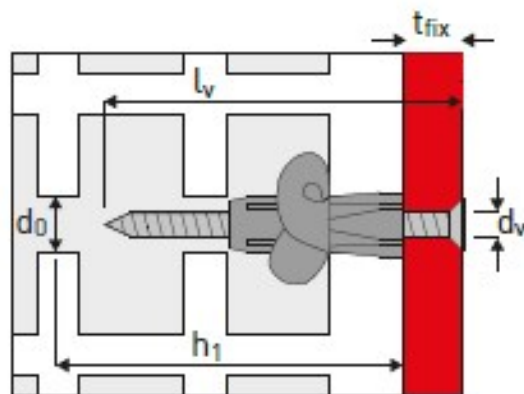

Code	Type	Ø Drilling	Length Plug	Depth Drilling	Max Thick. Fixable	Dim. Screw	Pack	Carton
	TPF/V-TPFC/V	d _v /(mm)	l _v /(mm)	h ₁ /(mm)	t _{fix} /(mm)	d _v l _v /(mm)	pcs.	pcs.
8705004	V 5x30	5	30	45	5	3,0x40	100	3.200
8705001	V 6x37	6	37	55	5	4,0x50	100	3.200
8705005	V 6x50	6	50	65	5	4,0x60	50	1.600
8705002	V 8x50	8	50	65	5	5,0x60	50	1.600
8705003	V 10x60	10	60	75	5	6,0x70	25	800
8705104	C/V 5x31	5	31	45	5	3,0x40	100	3.200
8705101	C/V 6x38	6	38	55	5	4,0x50	100	3.200
8705105	C/V 6x51	6	51	65	5	4,0x60	50	1.600
8705102	C/V 8x51	8	51	65	5	5,0x60	50	1.600
8705103	C/V 10x61	10	61	75	5	6,0x70	25	800