



NEW

HD
HEAVY
DUTY

MITERING CHOP SAW

evOLUTION®


S355 MCS

THE INDUSTRY'S FIRST

355MM METAL CUTTING MITERING CHOP SAW



46° - 46°
MITERING BASE



DUAL SLIDING
FRONT CLAMPS



12MM*
*mild steel only



120MM
X 120MM



100MM
X 165MM



Ø 120MM

IN A LEAGUE OF ITS OWN

**The first 355mm mitering
chop saw to hit the market.**


Features a 46° - 46° mitering base with quick
locking mitre handle, mitre detents at
common angles and an accurate
stainless steel mitre gauge.

Innovative dual sliding front
clamps with quick-release clasps
offer quick and versatile
clamping to securely hold
all shapes & sizes.





ACCURATE • RELIABLE • POWERFUL

evolution®

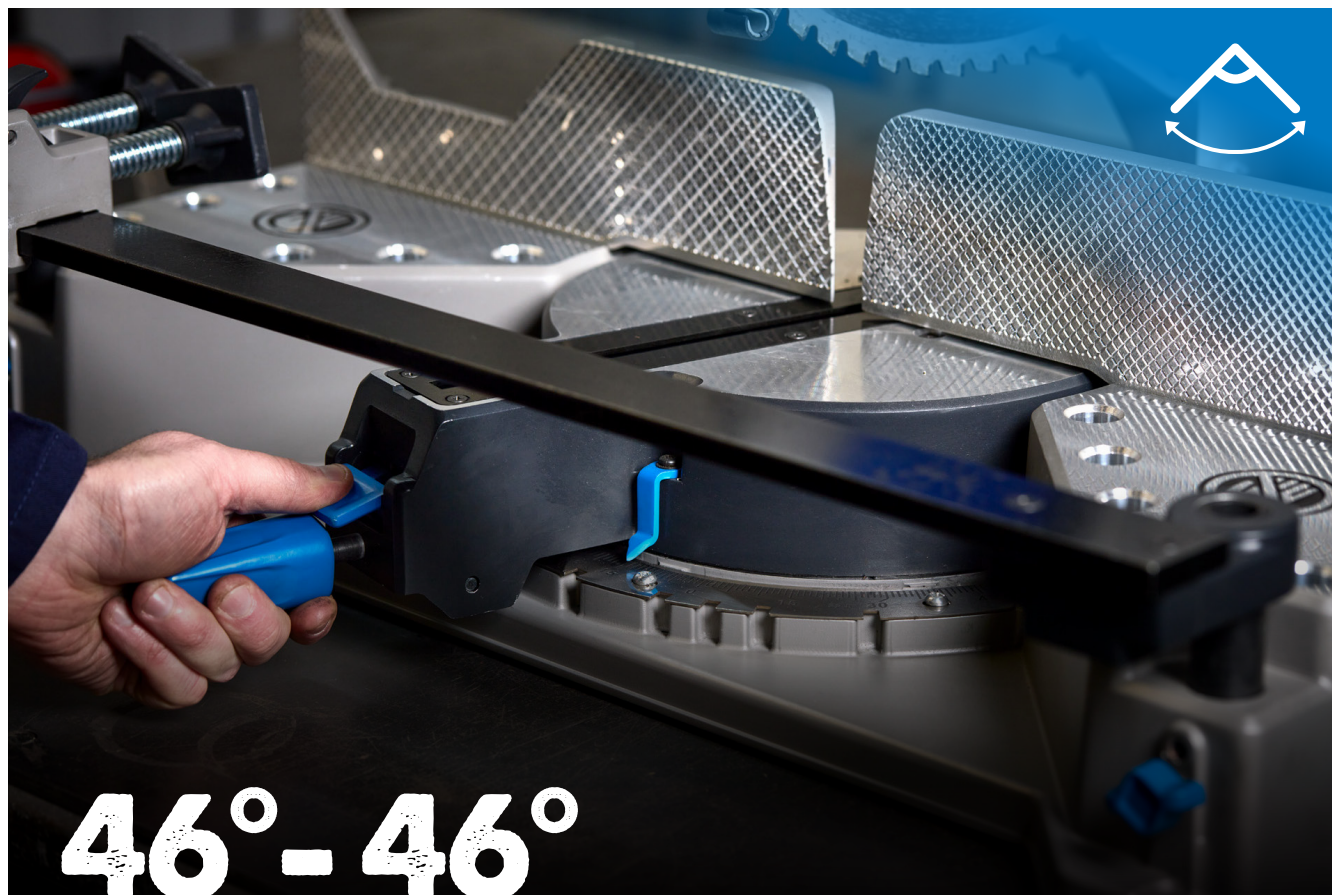

46° - 46° MITERING BASE

The industry's first 355mm chop saw with a mitering base. Enables you to mitre your saw instead of the workpiece, so cuts through long materials are quick and easy, even in small workshops. Features thumb lock lever and mitre detents at common angles for quick and tool free mitre setting.

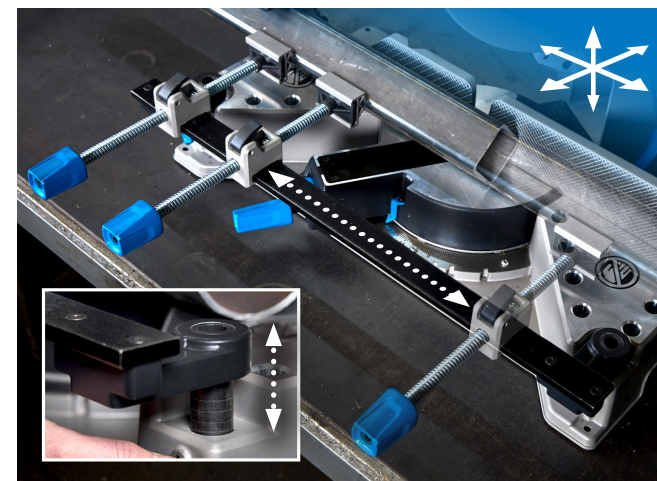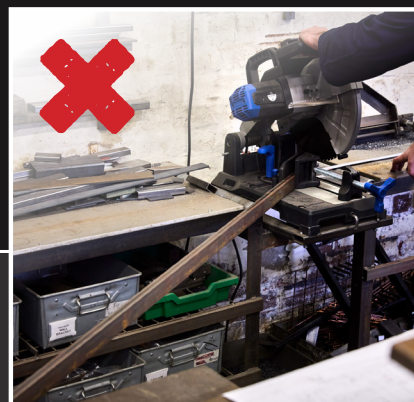

Dual Sliding Front Clamp

Innovative dual sliding front clamps mounted on a height adjustable bar gives forwards, backwards, up, down, left & right movement. Features quick release lead screws.



3-Position Cutting Head

Adjustable cutting head position ensures an optimal blade path through a variety of shapes for accurate cuts and maximum blade life. Features patented glide rails with locking pin

Ergonomic, Ambidextrous Handle & Trigger

Powerful 2200W motor

Head lock-down pin

Quick-release top clamp and
3 x V-block adapters included

Chip deflector

3-position head with glide rails &
locking pin for easy setting

Knurled fence to securely
grip the work piece



Holes in base to fit bench dogs

Height adjustable front clamp bar features
positive stops on vertical posts and thumb
screws to secure

46° L - 46° R miter capacity with
positive stops at 0°, 15°, 22.5°, 30° & 45°


Quick-release front clamps with
heavy-duty ACME lead screw

Full-width clamp bar allows free
horizontal movement of the front clamps



ACCURATE • RELIABLE • POWERFUL

evolution®

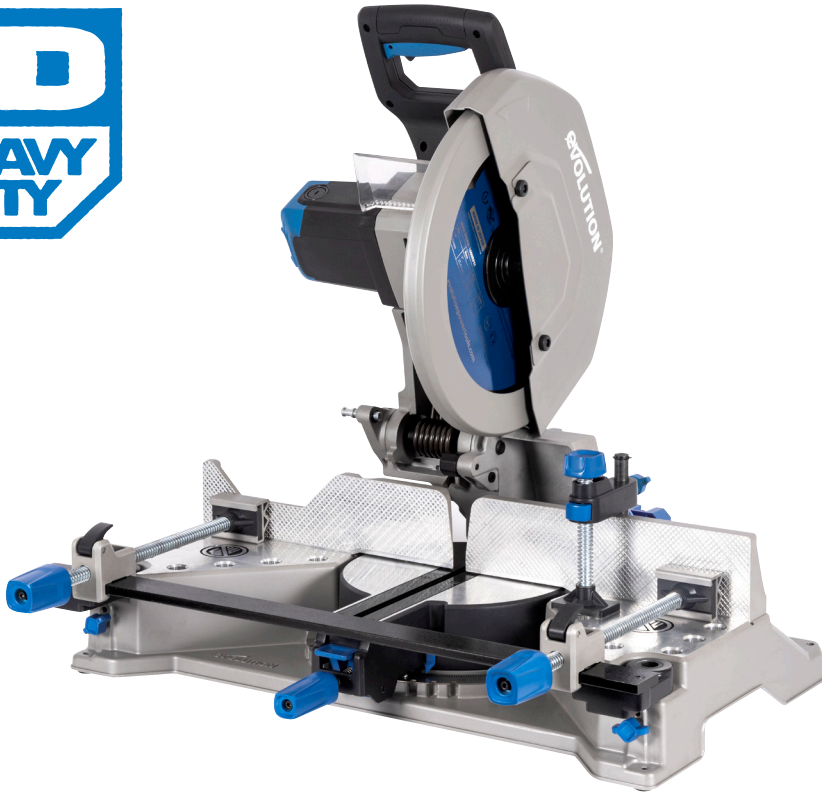

TECHNICAL SPECIFICATION

Motor Power 230v	2200w
Motor Power 110V	1600w
No Load Speed	1550rpm
Arbour size	25.4mm
Max. Plate Thickness	12mm
Square Tube at 90°	120 x 120mm
Square Tube at 45° ML	100 x 100mm
Square Tube at 45° MR	43 x 43mm
Rectangle Tube at 90°	165 x 100mm
Rectangle Tube at 45°	115 x 43mm
Round Tube at 90°	Ø 120mm
Round Tube at 45°	Ø 100mm
Cable Length	3m
Net Weight	35kg
Gross Weight	40kg
Packaging Dimensions	450 x 760 x 584mm
Container Quantities	20ft - 135 40ft - 300 40ft HC - 300
Guarantee	3 Years