

Insulated socket 1/2", long type, 12 point

190/2LVDEDP



Profiles



Product features

- material: premium flex chrome vanadium steel
- drop forged, entirely hardened and tempered
- head: chrome plated according to ISO 1456:2009
- made according to standard EN60900

Advantages:


- double layered - double coloured insulation for additional safety
- controlled with electrical test

Important!


- if second layer is visible, replace your VDE tool with a new one.

Standards

EN60900

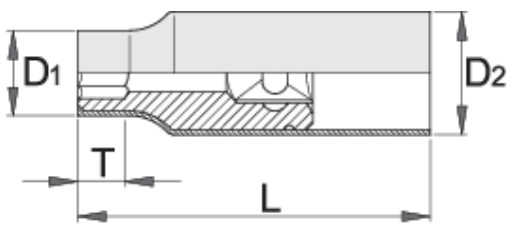


| Barcode | mm | L | D1 | D2 | T | Icon |
|---------|----|----|------|------|----|------|
| 619104 | 10 | 96 | 20.7 | 27 | 27 | 116 |
| 619105 | 11 | 96 | 21.6 | 27 | 27 | 116 |
| 619106 | 12 | 96 | 22.6 | 27 | 27 | 123 |
| 619107 | 13 | 96 | 23.3 | 27 | 27 | 127 |
| 619108 | 14 | 96 | 25.8 | 27 | 35 | 134 |
| 619109 | 15 | 96 | 26.8 | 27 | 35 | 132 |
| 619110 | 16 | 96 | 27.4 | 27 | 35 | 143 |
| 619111 | 17 | 96 | 30 | 27 | 35 | 151 |
| 619112 | 18 | 96 | 31.7 | 27 | 35 | 174 |
| 619113 | 19 | 96 | 32 | 27 | 35 | 170 |
| 619114 | 20 | 96 | 33.4 | 27 | 35 | 34 |
| 619115 | 21 | 96 | 33 | 27 | 35 | 188 |
| 621604 | 22 | 96 | 33.6 | 29.6 | 35 | 213 |
| 621605 | 24 | 96 | 35.6 | 31.6 | 35 | 238 |

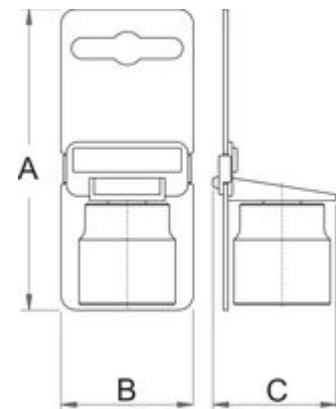

Retail packaging

| Barcode | MA | MB | MC | Icon |
|---------|-----|----|----|------|
| 619104 | 170 | 44 | 42 | 120 |
| 619105 | 170 | 44 | 42 | 120 |
| 619106 | 170 | 44 | 42 | 130 |
| 619107 | 170 | 44 | 42 | 135 |
| 619108 | 170 | 44 | 42 | 140 |

| Barcode | MA | MB | MC | Weight |
|---------|-----|----|----|--------|
| 619109 | 170 | 44 | 42 | 140 |
| 619110 | 170 | 44 | 42 | 150 |
| 619111 | 170 | 44 | 42 | 158 |
| 619112 | 170 | 44 | 42 | 180 |
| 619113 | 170 | 44 | 42 | 181 |
| 619114 | 170 | 44 | 42 | 207 |
| 619115 | 170 | 44 | 42 | 207 |
| 621604 | 170 | 44 | 44 | 220 |
| 621605 | 170 | 44 | 44 | 264 |

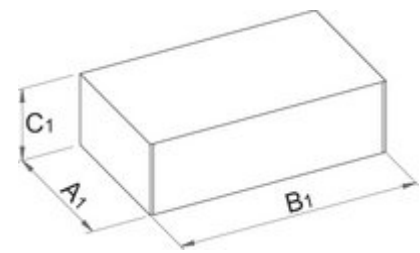

Transport packaging

| Barcode | Quantity | TA | TB | TC | Weight |
|---------|----------|----|-----|----|--------|
| 619104 | 4 | 85 | 288 | 52 | 525 |
| 619105 | 4 | 85 | 288 | 52 | 525 |
| 619106 | 4 | 85 | 288 | 52 | 580 |
| 619107 | 4 | 85 | 288 | 52 | 600 |
| 619108 | 4 | 85 | 288 | 52 | 620 |
| 619109 | 4 | 85 | 288 | 52 | 620 |
| 619110 | 4 | 85 | 288 | 52 | 660 |
| 619111 | 4 | 85 | 288 | 52 | 690 |
| 619112 | 4 | 85 | 288 | 52 | 780 |
| 619113 | 4 | 85 | 288 | 52 | 780 |
| 619114 | 4 | 85 | 288 | 52 | 890 |
| 619115 | 4 | 85 | 288 | 52 | 890 |
| 621604 | 4 | 85 | 288 | 52 | 940 |
| 621605 | 4 | 85 | 288 | 52 | 1115 |