


Insulated socket 1/2" - 190/2VDEDP

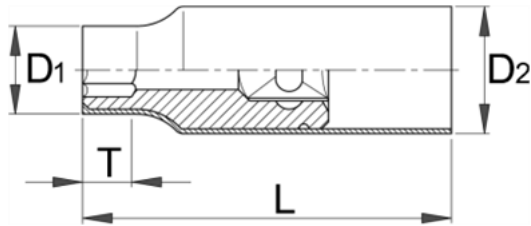

Description

- material: chrome vanadium
- drop forged, entirely hardened and tempered
- head: chrome plated according to EN12540
- made according to standard EN60900
-

Advantages:

- double layered - double coloured insulation for additional safety
- controlled with electrical test
-

Important!

- if second layer is visible, replace your VDE tool with a new one.

Technical Data

Barcode	UNIOR	D1	D2	L	T	Weight	Box	Case	Case
617803	8	18	27.4	54.6	12	65	4B	10	-
621593	9	51.5	17.1	26.5	12	74	4B	10	-
612195	10	18	26	51.5	12	72	4B	10	-
612196	11	19.5	26.5	51.5	12	75	4B	10	-
612197	12	20.5	26.5	51.5	12	74	4B	10	-
612198	13	21.5	26.5	51.5	12	77	4B	10	-
612199	14	22.5	26.5	51.5	12	75	4B	10	-
621594	15	51.5	23.5	26.5	12	78	4B	10	-
621595	16	51.5	26	25.2	12	82	4B	10	-
612200	17	28	26	51.5	12	83	4B	10	-
621596	18	51.5	28.5	26.5	12	94	4B	10	-
612201	19	30	28	51.5	14	96	4B	10	-
621597	20	51.5	31.3	27.3	14	106	4B	10	-
621598	21	51.5	32.5	28.2	14	115	4B	10	-
612202	22	34	29	51.5	14	108	4B	10	-
621599	23	53.5	35.1	29.4	14	132	4B	10	-
612203	24	37	32.5	55	16	158	4B	10	-
621600	26	55.5	38.8	33.2	16	173	4B	10	-
617804	27	40.5	32.5	58	18	176	4B	10	-
621601	28	56.5	41.3	33.4	20	195	4B	10	-
621602	30	59.5	44	37.1	22	247	4B	10	-
621603	32	59.5	46.6	39.4	22	284	4B	10	-

Packaging data

Barcode	UNIOR	Retail tool packaging					Transport package				
		A	B	C	Weight	Hand	A1	B1	C1	Weight	
617803	8	130	44	42	72	4	94	150	59	335	
621593	9	130	44	42	80	4	94	150	59	350	
612195	10	130	44	42	80	4	94	150	59	355	
612196	11	130	44	42	81	4	94	150	59	355	
612197	12	130	44	42	83	4	94	150	59	380	
612198	13	130	44	42	84	4	94	150	59	380	
612199	14	130	44	42	85	4	94	150	59	390	
621594	15	130	44	42	85	4	94	150	59	390	
621595	16	130	44	42	90	4	94	150	59	405	
612200	17	130	44	42	90	4	94	150	59	405	
621596	18	130	44	42	100	4	94	150	59	445	
612201	19	130	44	42	105	4	94	150	59	465	
621597	20	130	44	42	110	4	94	150	59	485	
621598	21	130	44	42	115	4	94	150	59	505	
612202	22	130	44	42	115	4	94	150	59	505	
621599	23	130	44	42	140	4	94	150	59	605	
612203	24	130	44	42	165	4	94	150	59	705	
621600	26	130	44	42	180	4	94	150	59	765	
617804	27	135	44	42	185	4	104	168	61	795	
621601	28	135	44	44	200	4	104	168	61	840	
621602	30	135	48	48	235	4	104	168	61	995	
621603	32	135	50	50	240	4	104	168	61	1015	